

## 3½" Clipped Head 34° Framing/Sheathing Nailer

This clipped head nailer provides all the important features you want at an affordable price. Its compact design makes it easy to handle, and easy on the arm. The 34° short, in-line magazines provide excellent maneuverability and line of sight. A powerful framer that drives a wide range of fasteners in three gauges (.120, .113, .131) from 2" to 3½" to handle virtually any job.



### Applications

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallets and crate assembly

### Features and Benefits


- Tool-free selectable trigger
- Sawtooth safety that digs in for precision toenailing
- Shorter, straight-line 34° magazine for better line of sight and superior maneuverability
- Reliable internal design with full round driver
- Tool-free adjustable exhaust
- Well-balance and powerful
- Tool-free adjustable depth-of-drive control
- Soft comfort grip handle reduces fatigue
- Five-year limited warranty

### Specifications

Item#	1G0101N
Selectable actuation trigger	
Reg. Operating Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 cycles per min.)	10 scfm
Air Inlet	3/8" NPT
Tool Weight	8 lbs (3.62 kg)
Height	13.5" (343mm)
Length	15.13" (384mm)
Width	4.17" (106mm)
Fastener Capacity	70

### Fastener Specifications

Shank Diameter	.113", .120", .131"
Fastener Range	2" - 3½"
Finish	Bright Basic, Galv. & Stainless
Collation	34° angled taped strip

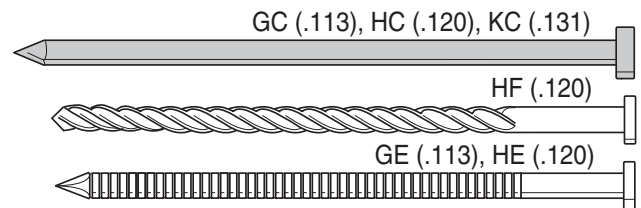

### Smooth-Shank

Length	Item Code	Carton Count	Finish
2 x .113	GC21APBKN	5.M	Bright
2 x .113	M002080	2.M	Bright
2 3/8 x .113	GC24APBK	2.5M	Bright
2 3/8 x .113	M002081	2.M	Bright
2 1/2 x .113	GC25APBK	5.M	Bright
3 x .120	HC27APBKN	3.M	Bright
3 x .120	M002023	2.M	Bright
3 x .131	KC27APBK	3.M	Bright
3 x .131	M002018	2.M	Bright
3 1/4 x .120	HC28APBKN	3.M	Bright
3 1/4 x .120	M002024	2.M	Bright
3 1/4 x .131	KC28APBK	3.M	Bright
3 1/4 x .131	M002019	2.M	Bright
2 1/4 x .113	GC23AHAN	1.M	Hardened
2 x .113	GC21AABN	6.7M	Galv
2 3/8 x .113	M002082	2.M	Galv
2 1/2 x .113	GC25AABN	5.M	Galv
3 x .131	KC27AABK	3.M	Galv
3 x .131	KC27AABN	3.M	Galv
3 1/4 x .131	KC28AABK	3.M	Galv
3 1/4 x .131	KC28AABN	3.M	Galv
2 3/8 x .113	GC24ASBK	2.M	Hot Dip
3 x .131	KC27ASBK	2.M	Hot Dip
3 1/4 x .131	KC28ASBK	2.M	Hot Dip
2 3/8 x .113	GC24AGBK	1.M	Stainless
3 x .131	KC27AGBK	1.M	Stainless
3 1/4 x .131	KC28AGBK	1.M	Stainless

### Screw-Shank-Strip

Length	Item Code	Carton Count	Finish
3x.120	HF27EPAN	3.1M	Bright
3x.120	HF27EDB	3.1M	Weatherx™2
3x.120	HF27AGBK	3.1M	Stainless

### Ring-Shank

Length	Item Code	Carton Count	Finish
2 3/8 x .113	GE24APBK	5.M	Bright
2 3/8 x .113	M002078	2.M	Bright
2 3/8 x .113	GE24AABK	2.5M	Galv
2 3/8 x .113	M002079	2.M	Galv
3 x .120	HE27AABKN	2.M	Galv
2x.113	GE21ASBK	2.M	Hot Dip
2 3/8 x .113	GE24ASBK	2.M	Hot Dip
3 x .120	HE27ASBK	2.M	Hot Dip
2x.113	GE21AGBK	1.M	Stainless
3 x .120	HE27AGBK	1.M	Stainless



Performance. Power.  
Productivity.™

# FramePro® 601

## FramePro® Tool Features



### Choose the right trigger system for your specific needs!

**Sequential Actuation Trigger** (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation Trigger** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how SENCO will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: [www.senco.com](http://www.senco.com)